





MRK.	DATE	REVISION	SIGN
------	------	----------	------

SPECIFICATION



1. Rating : 25mA, DC 12V (Switching)
25mA, DC 24V (None-Switching)
2. Contact Resistance : 100mΩ Max
3. Insulation Resistance : 100MΩ Min at DC 250V
4. Operating Force : 700gf Max
5. Life cycle : 10,000 steps
6. Sealing : IP67 (Dust & Water proof)
7. Packing : 50pcs Tube

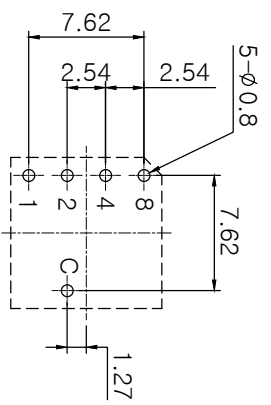


P.C.B DIMENSION (Top View)

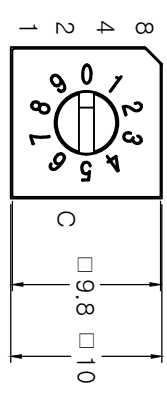

ACTUATOR

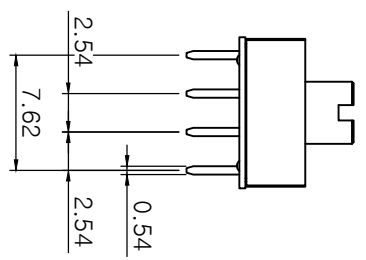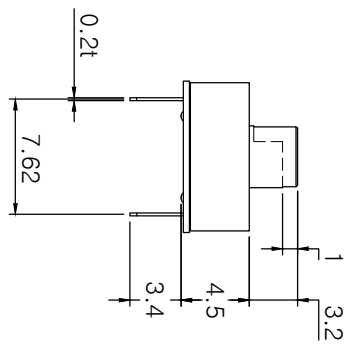

Real Code	
C	1 2 4 8
0	●
1	● ●
2	● ● ●
3	● ● ● ●
4	● ● ● ● ●
5	● ● ● ● ● ●
6	● ● ● ● ● ● ●
7	● ● ● ● ● ● ● ●
8	● ● ● ● ● ● ● ● ●
9	● ● ● ● ● ● ● ● ● ●



DRAW/DESIGNED	CHECKED	APPROVED	DATE	SCALE	MODEL NO.	REV.
J.S YANG	W.J LEE	K. LEE	2022-01-06	2:1	HAMR-10	REV.
2022-01-06	2022-01-06	2022-01-06				
			SIZE	DRAW NO.		
邦新达 BONEDA 深圳市子庚科技有限公司			A4	HAMR-10-03		03
ROTARY DIP SWITCH						