









MRK.	DATE	REVISION	SIGN
------	------	----------	------

## SPECIFICATION

1. Rating : 100mA, DC 42V (Switching)  
400mA, DC 42V (None-Switching)
2. Contact Resistance : 80mΩ Max
3. Insulation Resistance : 100MΩ Min
4. Operating Force : 120±30gf Max
5. Life cycle : 25,000 steps
6. Sealing : IP67 (Dust & Water proof)
7. Packing : 70pcs Tube / 6000pcs Reel Packing

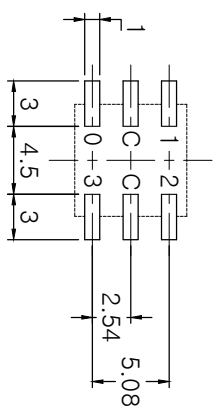

P.C.B DIMENSION (Top View)



ACTUATOR

Decimal Code			
04	C	0	1
0	●	●	
1	●		●
2	●		●
3	●		●

DRAW/DESIGNED	CHECKED	APPROVED	TITLE
J.S YANG	W.J LEE	K.I LEE	ROTARY DIP SWITCH
2021-10-13	2021-10-13	2021-10-13	SCALE MODE
BONSDA 深圳市子庚科技有限公司			SIZE DRAW
			MSSM-04S-03
			REV. 03