







REV NO.	DATE	REVISION	DR	CH	APP
△					

SPECIFICATION


1. Rating : 25mA, DC 12V (Switching)
25mA, DC 24V (None-Switching)
2. Contact Resistance : 100mΩ Max
3. Insulation Resistance : 100MΩ Min at DC 250V
4. Operating Force : 700gf Max
5. Life cycle : 10,000 steps
6. Sealing : IP67 (Dust & Water proof)
7. Packing : 50pcs Tube

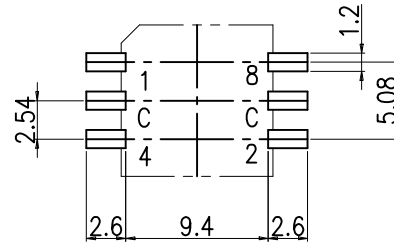

P.C.B DIMENSION (Top View)



ACTUATOR

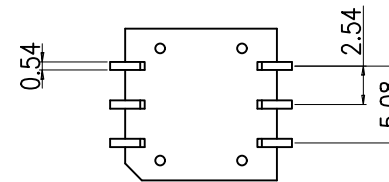

Real Coded					
	C	1	2	4	8
0	●				
1	●	●			
2	●		●		
3	●	●	●		
4	●			●	
5	●	●		●	
6	●		●	●	
7	●	●	●	●	
8	●				●
9	●	●			●
10	●		●		●
11	●	●	●		●
12	●			●	●
13	●	●		●	●
14	●		●	●	●
15	●	●	●	●	●
					A
					B
					C
					D
					E
					F

16
P
o
s
i
t
i
o
n

Din ISO-2768-1m					
Ranges	0.5~3	3~6	6~30	30~120	120~400
Tolerance	±0.1	±0.1	±0.2	±0.3	±0.5

DRAW/DESIGNED	CHECKED	APPROVED	SCALE	TITLE	ROTARY DIP SWITCH
H.S LEE	K.N KIM	W.I LEE	UNIT mm	MODEL NO.	UASR-16S
2023-09-18	2023-09-18	2023-09-18	SCALE N:S	DRAW NO.	UASR-16S(LG)-01
邦斯达 BONS DA 深圳市子庚科技有限公司				SIZE A4	REV. 01